

REMARKS

Examination of the present divisional application based on the above newly added claims is respectfully requested.

In the present preliminary amendment the specification has been amended to cross reference the related applications and to eliminate grammatical errors. Claims 1 – 20 have been canceled without prejudice and new claims 21 – 28 have been added. New claims 21 – 28 are directed to, for example, the fifth through eighth embodiments of the present invention shown in FIGS. 9 - 12.

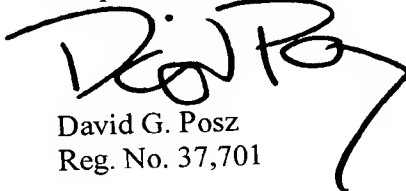
Support for independent claim 21 can be found, for example, on page 16, lines 8 – 18. Support for claim 22 can be found, for example, on page 16, lines 20 – 23. Support for claims 23 - 28 can be found, for example, on page 17, lines 5 – 22.

In view of the above amendments and remarks, the present application is believed to be in condition for allowance. A prompt notice to that effect is respectfully requested.

Although no additional fees are believed to be due, permission is hereby given to charge any unforeseen fees to deposit account 50-1147.

Law Office of David G. Posz  
2000 L Street, NW  
Suite 200  
Washington, DC 20036  
(202) 416-1638  
Customer No. 23400

Respectfully submitted,

  
David G. Posz  
Reg. No. 37,701

**MARKED-UP VERSION OF AMENDED SPECIFICATION AND CLAIMS**

**IN THE SPECIFICATION**

Please replace the paragraph beginning on page 1, line 4 with the following:

The present application is a division of Application Serial No. 09/536,401, filed on March 28, 2000, entitled DIRECT CURRENT MOTOR USING MAGNETS WITH EXTENSIONS, and is related [relates] to and incorporates herein by reference Japanese Patent Applications No. 11-142042 filed on May 21, 1999, No. 11-203769 filed on July 16, 1999 and No. 11-270566 filed on September 24, 1999.

The paragraph beginning on page 1, line 23 has been amended as follows:

The commutator 24 has a plurality of segments 24a on which the brushes 25 slide, so that the direct current flows from the [bushes] brushes 25 to the coils 27 through the segments 24a of a commutator 24. Thus, the armature 23 rotates in the clockwise direction (arrow X) in the figures, as the direction of current flowing in the coils 27 is reversed.

The paragraph beginning on page 2, line 15 has been amended as follows:

Figs. 14A to 14C [corresponds] correspond to Figs. 13A to 13C. When the armature 23 rotates as shown in the order of Figs. 13A, 13B and 13C, the direction of current I in the [soil] coil is reversed. The direction of the magnetic field in the core 26 wound with the core coil 27 is reversed. The rotating force is generated to rotate the armature 23 by the electromagnetic force of the coils 27 and the magnetic force of the magnets 21 and 22.